

## FIRE DOOR



LETOON FIRE DOOR  
[www.letonhangar.com.tr](http://www.letonhangar.com.tr)

# FIRE DOOR

## 60 and 120 Minute Fire Doors

Standard fire doors made of galvanized sheet with epoxy polyester powder painted.  
Door casings are produced as 1.5 mm sheet metal half casing.

It is also produced in full frame with the wall thickness adjusted according to the project requirement.

The door wing is manufactured from 0.8mm galvanized sheet and the wing is supported by the sheet bending profiles on the sides of the wing.

The doors are used Spring hinges, so that the doors are closed by themselves.

Smoke gaskets are used to ensure the sealing between the door and the case.

Outer arm-locks and panic bars are used as standard in the doors.

Fire Doors have 60 and 120 minutes fire resistance certificates and fire certificates are delivered to the CLIENT with the delivery.

It can be painted in the desired Ral color.



# FIRE DOOR

<b>Class Frame</b>	<b>F 120 (TS-EN 1634-1)</b>
<b>Sheet Thickness</b>	1.5mm Galvanised Steel Sheet
<b>Leaf Sheet Thickness</b>	0.8mm Galvanised Steel Sheet
<b>Leaf Thickness</b>	60mm
<b>Frame Type</b>	Half Frame (Full Frame - optional)
<b>Hinge</b>	2pc. ( 1pc. Hinge)
<b>Door Seal</b>	Smook Gaskets
<b>Accessory</b>	Panic Bar, external handle
<b>Optional</b>	Outer Door Handle, Door Hydraulics, Fire Resistant Glass.
<b>Standart Colors</b>	Ral 1013, Ral3020, Ral5010, Ral7032, Ral7035, Ral9002, Ral9005, Ral9006, Ral9010









Panicbar, Auter Door Hadle

Panicbar, Auter Door Handle, Lock



# FIRE DOOR

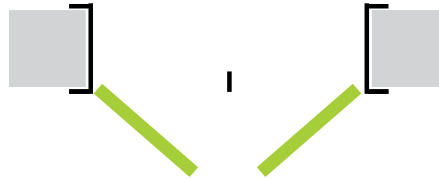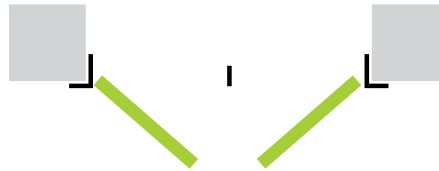

LETOON FIRE DOOR  
[www.letonhangar.com.tr](http://www.letonhangar.com.tr)